



DOWNLIGHT LED ETANCHE

COB 5, 7 , et 10 W
ALUMINIUM , 230 V

Version IP 64.

Verre au choix . IRC > 80.

GARANTIE 2 ANS



5 / 10 W

110 / 265 Volts

40000 h

-20 a +50 °C


IP 64

30/ 60 degrés


temp couleur : 2900 / 5800 °K

350 / 850LM

Classe 2

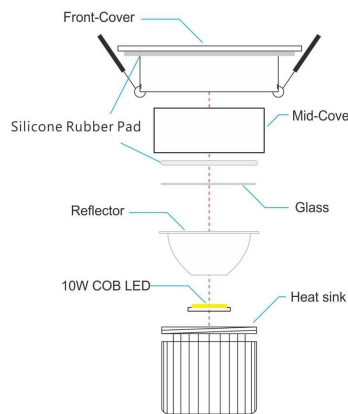

MODELE 10 W 60°

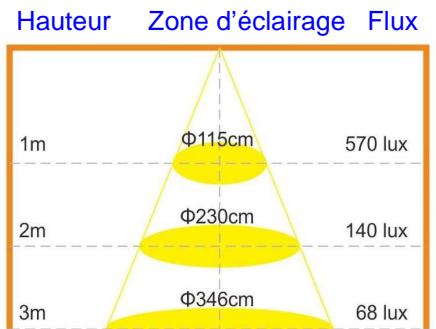

| REF | DESIGNATION | IP | DIMS mm | Encast | Poids | TENSION | PUISS | T°KELVINS | Nb LUMS |
|-------------|-----------------------|----|-------------|--------|-------|-----------|-------|-----------|---------|
| UPCOB05BCED | Downlight Led COB 5W | 64 | Dia 87 H 82 | Dia 75 | 370 g | 110/265 V | 5 W | 2900 | 350 |
| UPCOB05BNED | Downlight Led COB 5W | 64 | Dia 87 H 82 | Dia 75 | 370 g | 110/265 V | 5 W | 4200 | 400 |
| UPCOB05BFED | Downlight Led COB 5W | 64 | Dia 87 H 82 | Dia 75 | 370 g | 110/265 V | 5 W | 5800 | 450 |
| UPCOB07BCED | Downlight Led COB 7W | 64 | Dia 87 H 82 | Dia 75 | 370 g | 110/265 V | 7 W | 2900 | 450 |
| UPCOB07BNED | Downlight Led COB 7W | 64 | Dia 87 H 82 | Dia 75 | 370 g | 110/265V | 7 W | 4200 | 500 |
| UPCOB07BFED | Downlight Led COB 7W | 64 | Dia 87 H 82 | Dia 75 | 370 g | 110/265 V | 7 W | 5800 | 550 |
| UPCOB10BCED | Downlight Led COB 10W | 64 | Dia 87 H 82 | Dia 75 | 370 g | 110/265 V | 10 W | 2900 | 700 |
| UPCOB10BNED | Downlight Led COB 10W | 64 | Dia 87 H 82 | Dia 75 | 370 g | 110/265 V | 10 W | 4200 | 770 |
| UPCOB10BFED | Downlight Led COB 10W | 64 | Dia 87 H 82 | Dia 75 | 370 g | 110/265 V | 10 W | 5800 | 850 |